

FHESM400A/FHESM400W



FHESM400A/W

CARACTERÍSTICAS PRINCIPALES / MAIN FEATURES / PRINCIPALES CARACTÉRISTIQUES

- ✓ Cubo compacto y cristalino/ Compact and crystal cube/ Cubes compacts et cristallins.
- ✓ Acero inoxidable AISI 304 Acabado Scotch Brite/ AISI 304 SS Scotch Brite finish/AISI 304 SS Scotch Brite finish.
- ✓ Clase tropical +43°C/ Tropical class +43°C / Classe tropicale +43°C.
- ✓ Filtro anticalcáreo fácil de limpiar/ Cleanable antiscaler filter/ Filtre anti-calcaire facile à nettoyer.
- ✓ Sistema de refrigeración por aire o por agua/ Air or water cooling system/ Système de refroidissement par air ou par eau.
- ✓ Superficies internas redondeadas fáciles de limpiar/ Easy cleanable internal rounded surfaces/Surfaces internes arrondies faciles à nettoyer.
- ✓ Almacenamiento aislado sin HCFC/ HCFC-Free insulated storage/ Stockage isolé sans HCFC.
- ✓ Funcionamiento electromecánico/ Electromechanical operation/ Fonctionnement électromécanique.
- ✓ Sistema de lavado automático/ Automatic washing system/ Système de rinçage automatique.

FHESM400A/FHESM400W

FHESM400A/ FHESM400W

Medidas LxFxA/Dimensions LxDxH/Dimensions (L-P-H mm)	900 - 588 - 705
Medidas de embalaje/ Packing measures / Mesures d'emballage (L-P-H mm)	965 - 655 - 880
Peso neto/Net Weight/ Poids net (kg)	137 kg
Peso bruto/Gross Weight/Poids brut (kg)	152 kg
Acabado/ Finish/ Finition	AISI 304 stainless steel, scotch brite
Datos técnicos/Technical Features/ Informations techniques	
Producción en 24h / Production in 24h / Production en 24h	400 kg
Capacidad de almacenamiento/ Store capacity up to/ Capacité de stockage	-
Sistema de refrigeración/ Cooling system/ Système de refroidissement	A-W
Tipo de cubo/ Kind of cube/ Type de seau (mm)	-
Refrigerante/ Refrigerant/ Refrigerant	R452A
Tensión/Power/Tension	220-240 V ~ 50 Hz
Potencia/Power/Puissance (W)	2140 W
Consumo de agua/ Water consumption/ Consommation d'eau	A:1 l/kg, W:7.5 l/kg
Conexionado / Connections / Connexions	
Todas las medidas se refieren a la esquina inferior izquierda trasera (L-H-Ø) / All measures are referred to the rear bottom-left corner (L-H-Ø)/ Toutes les mesures sont rapportées au coin arrière inférieur gauche (L-H-Ø)	
Water in.: 463 mm / 18 4/16" - 187 mm / 7 6/16" - 3/4" Cond. water in.: 463 mm / 18 4/16" - 120 mm / 4 12/16" - 3/4" Water out.: 428 mm / 16 14/16" - 60 mm / 2 6/16" - 24 mm / 15/16" Electrical connections: 434 mm / 17 1/16" - 257 mm / 10 2/16" Cond. water out.: 472 mm / 18 9/16" - 60 mm / 2 6/16" - 12 mm / 8/16" Remote connections: 473 mm / 18 10/16" - 257 mm / 10 2/16"	

www.infrico.com

info@infrico.com

Ctra. de Aguilar A-318 por Moriles Km. 15,5 - A-3132 - 14900, Lucena (Córdoba)

Características técnicas y constructivas sujetas a variación sin previo aviso

We reserve the right to change specifications without prior notice

Les caractéristiques techniques et la conception peuvent être sujettes à modifications, sans préavis



Condiciones de trabajo/ Working conditions/
Conditions de travail

• Location: **Indoor**

	Min	Max
Ambient temperature	+10° C / +50° F	+43° C / 110° F
Water temperature	+3° C / +37° F	+32° C / +90° F
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

Características / Features / Caractéristiques

Interruptor basculante ON-OFF/ ON-OFF rocker switch/
Interrupteur à bascule ON-OFF
Voltaje estándar y especiales/ Standard and special voltajes/
Tensions standard et spéciales
Sin HFC/ HFC Free/ Sans HFC

Performances

► Performances

		Water temperature					
		7° C	45° F	15° C	60° F	21° C	70° F
Air temperature	10° C	446 kg					
	50° F		983 lbs				
	21° C			400 kg			
	70° F				882 lbs		
	32° C					360 kg	
	90° F						794 lbs


FICHA TÉCNICA / DATA SHEET / FICHE TECHNIQUE
FABRICADOR DE HIELO / ICE MAKER / MACHINES À GLAÇONS



Rev: 03/04/2025

FHESM400A/W

VISTAS GENERALES/ GENERAL VIEWS/ VUES GÉNÉRALES

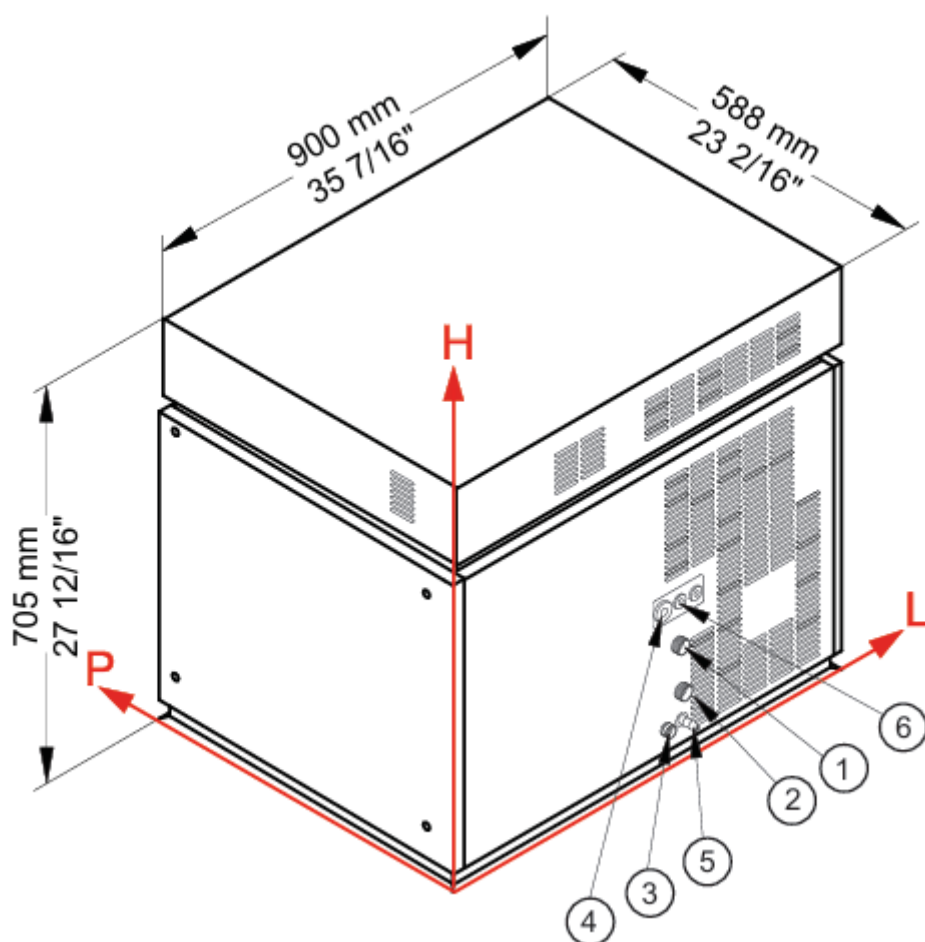

www.infrico.com
info@infrico.com

Ctra. de Aguilar A-318 por Moriles Km. 15,5 – A-3132 - 14900, Lucena (Córdoba)

Características técnicas y constructivas sujetas a variación sin previo aviso
We reserve the right to change specifications without prior notice

Les caractéristiques techniques et la conception peuvent être sujettes à modifications, sans préavis



Rev: 01 Fecha/Date: 03/04/2025 FHTB57AHC_LS_23_01