

VEB 4 CC – VEB 6 CC – VEB 7 CC – VEB 8 CC – VEB 9 CC



VEB 8 CC

FORTALEZAS / STRENGTHS / FORCES

- ✓ Mayor precisión en el control de la temperatura
 - ✓ Mayor capacidad.
 - ✓ Cristal panorámico sin marco para mayor visibilidad del producto.
-
- ✓ Greater precision in temperature control.
 - ✓ Larger capacity.
 - ✓ Frameless panoramic glass for greater product visibility.
-
- ✓ Plus grande précision dans le contrôle de la température.
 - ✓ Une plus grande capacité.
 - ✓ Verre panoramique sans cadre pour une meilleure visibilité des produits.


VEB 4 CC – VEB 6 CC – VEB 7 CC – VEB 8 CC – VEB 9 CC

VEB 4 CC – VEB 6 CC – VEB 7 CC – VEB 8 CC – VEB 9 CC			
Rango Tª / Operating temp / Régime de Température	-1ºC / +7ºC		
Clase climática / Climate class / Classe climatique	4 (30ºC, 55%HR)		
Capacidad / Capacity / Capacité (l)	9,2		
	13,6		
	16,0		
	18,4		
	20,4		
Medidas exteriores LxFxA / Overall dimensions LxDxH / Dimensions extérieures LxIxH (mm)	810 x 415 x 195		
	1.162 x 415 x 195		
	1.338 x 415 x 195		
	1.514 x 415 x 195		
	1.690 x 415 x 195		
Características constructivas / Cabinet Construction / Caractéristiques du fabricant			
Material exterior / Exterior Material / Matériau extérieur	Aluminio anodizado	Anodized aluminium	Aaluminum anodisé
Material interior / Interior Material / Matériau intérieur	Acero inoxidable AISI 304	AISI 304 Stainless Steel	Acier Inoxydable AISI 304
Características del interior / Interior Construction / Caractéristiques intérieures	Fondos embutidos, uniones de amplio radio.	Pressed inner guides, rounded interior corner	Fonds emboutis, intérieur bords arrondis à large rayon
Desagüe / Drain /Vidange	✓		
Iluminación LED / LED lighting Eclairage LED	✓		
Tipo aislamiento / Insulation / Type d’isolation	40kg/m3, libre CFCs, cero ODP y bajo GWP	40kg/m3, CFCs free, zero ODP and low GWP	à haute pression de CFC 40kg/m³ , Zéro ODP et GWP faible.
Espesor aislamiento / Insulation thickness / Epaisseur de l’isolation (mm)	70		
Espumante / Blowing Agent / Mousse	HFO		
Características frigoríficas / Refrigeration / Caractéristiques du froid			
Controlador / Thermostat / Thermostat	Controlador digital	Digital controller	Contrôleur électronique
Desescarche / Defrost / Dégivrage	Manual	Manual	Manuel
Dispositivo expansión / Expansion Device / Détendeur	Capilar	Capillary	Capillaire
Nivel sonoro / Sound level / Niveau de bruit		< 70 dB	
Datos técnicos / Technical Features / Informations techniques			
Refrigerante / Refrigerant / Gaz réfrigérant	R600a		
Carga / Ref amount / Charge de gaz (gr)	60		
	65		
	70		
	75		
	80		
Tensión/fases/frecuencia / Power Supply / Tension /phase/Fréquence	230V / 1 / 50 Hz		
Potencia frigorífica / Refrigeration Capacity / Puissance frigorifique (W)	169		
Potencia / Power / Puissance (W)	129		











	131 132 132 133
Consumo / Energy Consumption / Consommation (kWh/24h)	1,93 1,95 1,97 1,98 2,00
Medida unidad / Measurement unit / Unité de mesure L x l x H (mm)	316 x 382 x 260
Paletización / Crating / Palettisation	
Medidas paletización LxFxA / Crated dimensions / Dimensions palettisation L x l x H (mm)	940 x 470 x 600 1.247 x 470 x 600 1.448 x 470 x 600 1.604 x 470 x 600 1.800 x 470 x 600
Volumen bruto / Crated volume / Volume brut (l)	66 94 108 123 137
Peso bruto / Weight / Poids brut (kg)	50 50 55 60 66
Opcionales / Options	
	115 V / 1 ph / 60Hz 115 V / 1 ph / 60Hz 115 V / 1 ph / 60Hz
	220 V / 1 ph / 60 Hz 220 V / 1 ph / 60 Hz 220 V / 1 ph / 60 Hz

VEB 4 CC – VEB 6 CC – VEB 7 CC – VEB 8 CC – VEB 9 CC

PERFIL / PROFILE / PROFIL

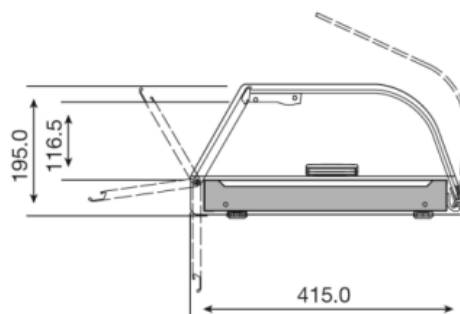

CONEXIONES / CONNECTION / CONNEXIONS

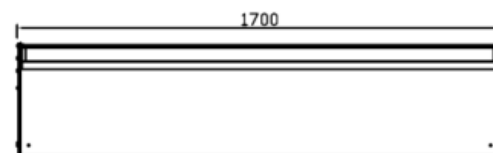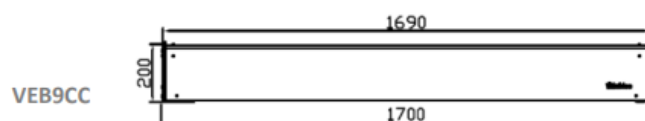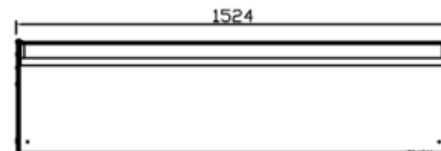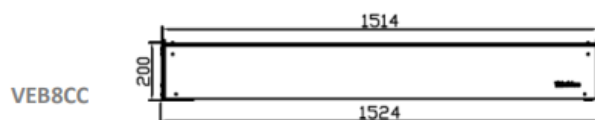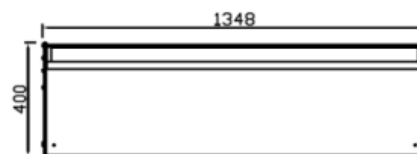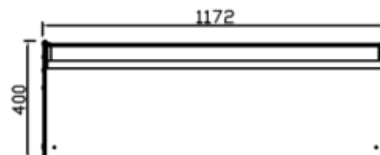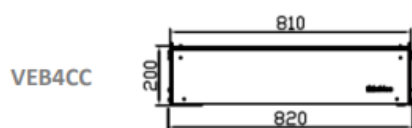

www.infrico.com

info@infrico.com


Ctra. de Aguilar A-318 por Moriles Km. 15,5 – A-3132 - 14900, Lucena (Córdoba)

Características técnicas y constructivas sujetas a variación sin previo aviso

We reserve the right to change specifications without prior notice

Les caractéristiques techniques et la conception peuvent être sujettes à modifications, sans préavis

VEB 4 CC – VEB 6 CC – VEB 7 CC – VEB 8 CC – VEB 9 CC

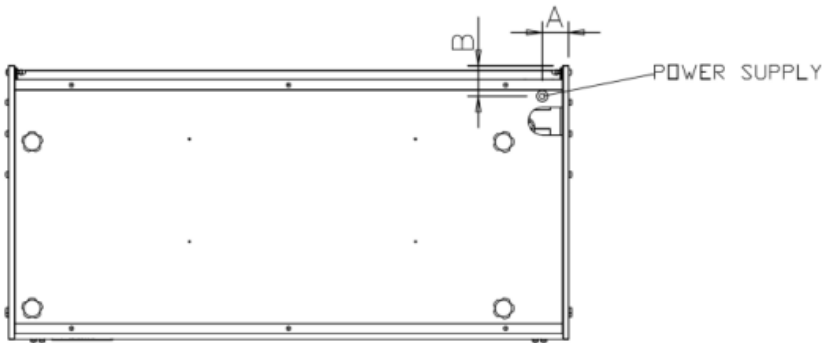

MODELOS	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)
VEB4CC	38,0	44	-	-	-
VEB6CC	38,0	44	-	-	-
VEB7CC	38,0	44	-	-	-
VEB8CC	38,0	44	-	-	-
VEB9CC	38,0	44	-	-	-

Rev: 01 Fecha/Date: 12/11/2024 VEB_CC_00_ES_EN_FR_12_11